

Product Information



Analogue Universal Time Switch

Part No. CTS-64B


APPLICATIONS:

- Machinery control
- Heating systems control
- Devices, motors and pumps control

MOUNTING OPTIONS:

- Surface Mount
- Recessed
- DIN Mount

DIMENSIONS:

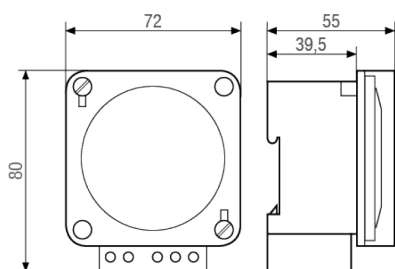

TECHNICAL DATA:

Electrical Data	
Supply Voltage	AC 220-240V ± 10% 50Hz
Current Output	Changeover, potential-free
Current Capacity - Resistive Load - AC1	16A/250V AC
Current Capacity - Inductive load cos.phi 0.6 - AC3	8A/250V AC
Switching Capacity - Minimal	100mA/20V AC/DC
Load Incandescent Bulb	1.300W
Power Consumption	1VA
Accuracy	Mains synchronised
Power Reserve	No
Power Connection	
Device	Flat connection DIN 6.3

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

Product Information



Operating Specifications

Manual Switch	Automatic mode Fix ON/OFF
Channels	1
Tampering Protection	Lead-sealable
Program	Daily program (ON/OFF)

Display and Format

Shortest Switching Time	ON/OFF 15 Minutes
-------------------------	-------------------

Operating Conditions

Temperature (Operation)	-20°C - +55°C
-------------------------	---------------

General Specifications

Drive Type	Synchronous / Grey
Colour	Grey
Weight	155g
Dimensions	72 x 72 x 55mm (H x B x T)
Mounting Depth	39,5mm (T)


Compliance with Standards

Protection Class	II, according to corresponding mounting
Approval Mark	CE
Standards and Guidelines	EN 60730-1, EN 60730-2-7

Scope of Delivery

Housing	Glass Terminal Cover Base
---------	---------------------------------

CIRCUIT DIAGRAM:

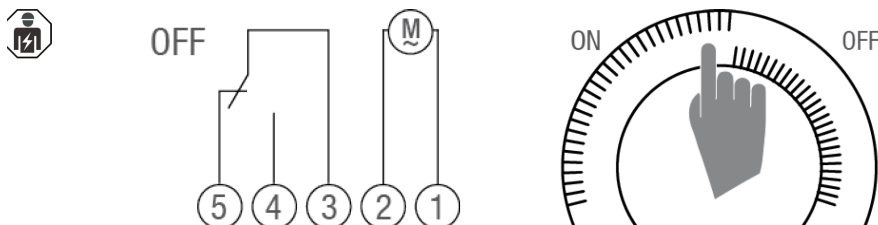

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.