

Lighting and Energy Control



Contents

Dimmers	84
Timers, Sensors and Relays	85
USB Chargers	89
Wall Timers	90
Outdoor Switches	92
Application Kits	92
Remote Switching	94
Ripple Filters	94
Accessories	95



Smart Living

Every home deserves the best



**Timers, Switches,
Relays**



Dimmers



Wall Timers



Outdoor Switches



Wireless Switching



USB Chargers



All of our S-Click products are compatible with HPM and Clipsal wall plates.



S-Click™ SMART LIVING Range

The modular S-Click™ Smart Living range is Australia's largest; with a choice for almost any application. The entire S-Click™ range is simple to install, easy to use and creates a new, modern look for your home.

The range includes solutions for bedrooms, kitchens, hallways, dining rooms, outdoor living rooms, bathrooms, heat lamps, fans, exhaust fans, spa air pumps, towel rails, laundries, meeting rooms, workspaces, robes, pantries, cellars, garages, garden lighting, water features, security lighting, and charging for smart phones, tablets and portable USB devices. Smart Living - Every home deserves the best.

DIGITAL DIMMER™ RANGE

Part No.	Description	Suggested Use	
HNS610DT	Push Button Digital Dimmer™	Dimmable LED & CFL Lighting & Multitway Dimming	 HNS610DT HNS620DT HNS630DT HNS020RB
HNS620DT	Rotary Digital Dimmer™ Switch	Dimmable LED & CFL Lighting & Multitway Dimming	
HNS630DT	Rotary Digital Dimmer™	Dimmable LED & CFL Lighting Dual Switch Compatible	
HNS020RB	Remote Button	Use with Dimmer and 3-Wire Timers and Switches Only	

FANS, MOTORS, COMMERCIAL LIGHTS, TIMERS, SWITCHES, RELAYS & SENSORS

Part No.	Description	Suggested Use	
HNS440TM	Minute Timer 3-Wire	Heat Lamps, Fans, Exhaust Fans, Spa Air Pump	 HNS440TM HNS450TM HNS460SW HNS210TD
HNS450TM	Hour Timer 3-Wire	Small Pool Pumps, Water Features, Garden & Decorative Lighting	
HNS460SW	Electronic Switch 3-Wire	Exhaust Fans, Garden & Decorative Lighting	
HNS010RL	Booster Relay 3-Wire	Large Pool Pumps, Electrical Motors & Timed Power Points	
HNS050MD	Light Sensitive Motion Detector 3-Wire	Meeting Rooms, Workspaces	 HNS010RL HNS050MD HNS060MD HNS20TD
HNS060MD	Continuous Motion Detector 3-Wire	Bathrooms, Office Bathrooms & Laundries	
HNS210TD	Heavy-Duty Timer Switch 3-Wire	Suitable for majority of applications especially suited for fan motors	
HNS220TD	Advanced Heavy-Duty Timer Switch 3-Wire	Improved compatible replacement for Clipsal 2031VETR3 and 32VETR3	

MULTIWAY DIMMING

Part No.	Description	Suggested Use	
HNS610DSDK	Dual Switching Dimmer Kit HNS610DT & HNS020RB	Multitway dimming	

DOMESTIC TIMERS & SWITCHES

Part No.	Description	Suggested Use	
HNS410TM	Minute Timer 2-Wire	Lights - Hallway, Garages, Laundries, Wardrobes	 HNS410TM HNS420TM HNS430SW
HNS420TM	Hour Timer 2-Wire	Heated Towel Rail (<400W), Heated Mirrors, Security Lighting, Garden and Decorative Lighting	
HNS430SW	Electronic Switch 2-Wire	Lights, Heaters, Garden Lighting	

ROUTINE TIMERS

Part No.	Description	Suggested Use	
HNS710RT	Routine Timer	Towel Rails, Security Lighting, Heated Mirrors	

CHARGERS

Part No.	Description	Suggested Use	
HNS070UC	5W USB Charger 3-Wire	Use for charging Apple™, Samsung™ and all other phone and tablet brands. Charge other USB devices.	

KITS

Part No.	Description	Suggested Use	
HNS710RT-KIT	Towel Rail Timer Kit 2-Wire	350W Max Load: Heated Towel Rail, Heated Mirrors, Outdoor Lights	 HNS710RT-KIT HNS442FF HNS443BK HNS444BK
HNS442FF	Follow-On Fan Kit	Bathrooms, Office Bathrooms, Laundries, Change Rooms	
HNS443BK	3 in 1 Bathroom Timer Kit 3-Wire	1200W for Bathroom Heat/Light/Fan Units	
HNS444BK	4 in 1 Bathroom Timer Kit 3-Wire	2400W for Bathroom Heat/Light/Fan Units	

Sunset Switch Weatherproof 16A IP66

- Upgraded 4 in 1 patented design - choose between standard, timer, energy saving ECO and real time modes



Part No. HSC110SS

Radio Switch Kit

- Put switches anywhere with no switch wiring needed, saving time and money



Part No. HNS310RK

Ripple Signal Filter

- Eliminates off peak ripple tones in certain geographical areas in NSW and QLD



Part No. HNS030RF-1050 for 1050Hz
Part No. HNS030RF-750 for 750Hz

LIGHTING AND ENERGY CONTROL

DIMMERS

S CLICK ROTARY DIMMERS

ROTARY DIGITAL DIMMER SW 2-W 240V 350V

Unit: EA Qty: 1



Part No. **HNS620DT**

- Rotary Digital Dimmer and push button ON/OFF switch in one - perfect for dimmable LED lighting
- Suits HPM, Clipsal, Voltrex & Traders wall plates, knobs included
- World's lowest standby power - 100mW
- Patented ripple tone rejection



ROTARY DIGITAL DIMMER 2-WIRE 240V 350V

Unit: EA Qty: 1



Part No. **HNS630DT**

- Rotary Digital Dimmer - perfect for dimmable LED lighting
- Suits HPM, Clipsal, Voltrex & Traders wall plates, knobs included
- Separate ON/OFF switch required
- Compatible with S-Click 3-Wire Timers and Switches



ROTARY DIG DIMMER SW S-PREMIUM 240V 350W

Unit: EA Qty: 1



Part No. **HNS626DT**

- Rotary Digital Dimmer and push button ON/OFF switch in one - perfect for dimmable LED lighting
- Suits Clipsal Saturn and Saturn Zen style wall plates
- Patented ripple tone rejection



ROTARY DIG DIMMER S-PREMIUM 240V 350W

Unit: EA Qty: 1



Part No. **HNS636DT**

- Rotary Digital Dimmer - perfect for dimmable LED lighting
- Suits Clipsal Saturn and Saturn Zen style wall plates
- Separate ON/OFF switch required
- Compatible with S-Click 3-Wire Timers and Switches



S CLICK PUSH BUTTON

PUSH BUTTON DIGITAL DIMMER 2-W 240V 350W

Unit: EA Qty: 1



Part No. **HNS610DT**

- An ON/OFF switch in one - perfect for dimmable LED lighting
- Suits HPM, Clipsal, Voltrex & Traders wall plates
- Buttons included
- Patented ripple tone rejection



PUSH BTN DIG DIMMER S-PREMIUM 240V 350W

Unit: EA Qty: 1



Part No. HNS616DT

- An ON/OFF switch in one - perfect for dimmable LED lighting
- Suits Clipsal Saturn and Saturn Zen style wall plates
- Patented ripple tone rejection



TIMERS, SENSORS AND RELAYS

S CLICK SWITCHES

ELECTRONIC ON OFF MECH SW 2-W 240V 1.7A

Unit: EA Qty: 1



Part No. HNS430SW

- Electronic ON/OFF light switch with LED indicator
- Quick tap turn ON - quick tap turn OFF
- Can be retrofitted to most installed lights



ELECTRONIC ON OFF MECH SW 3-W 240V 5A

Unit: EA Qty: 1



Part No. HNS460SW

- Electronic ON/OFF power switch with LED indicator
- Quick tap turn ON - quick tap turn OFF
- Can power fans, motors, pumps, contactors and inductive loads




HNS410TM Minute Mech Timer 2-Wire

FEATURES

- Supports Timer and untimed ON modes of operation
- Blue LED indicates device status
- User programmable time-out period.
- Programmable in 1 minute increments from 1 to 30 minutes.
- When ON - Quick tap turns power off.
- Quick LED flashing within 10 seconds of time out provides expiry warning.
- Retains setting even after loss of power
- Compatible with HPM and Clipsal style wall plates.
- Remote switch compatible.
- Time set to 30 minutes out of box.

OPERATING CONDITIONS

- Operating Voltage: 230 – 240V a.c. 50Hz
- Operating Temperature: 0 to +50 °C
- Certified Standard: CISPR15, AS/NZS 3100
- Maximum Load: 400VA*
- Minimum Load: 10VA
- Maximum Current Capacity 1.7A

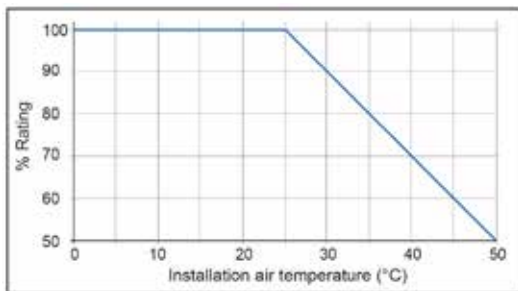

LOAD COMPATIBILITY

- | | |
|---|-----|
| • Incandescent | √ |
| • 240V Halogen | √ |
| • Fluorescent Tube with electronic ballast: | √** |
| • Fluorescent Tube with iron core ballast | X |
| • Compact Fluorescent | √** |
| • Electronic Transformer | √ |
| • LED | √** |
| • Wirewound Transformer | X |
| • Fan Motors | X |
| • Inductive Loads eg. Contactor/ Relay | X |

NOTE: Operation at temperature, voltage or load outside of the specifications may cause permanent damage to the unit. When used in ambient temperatures above 25°C the timer must be de-rated according to the chart.

* Check manufacturer's recommendations when putting lamps in parallel.

** Subject to manufacturers recommendations, luminaires and lamps suitable for electronic switches only. Note: Please got to CABAC's website to see a complete list of tested compatible lamps under "Technical Data"

Part No. HNS410TM



For illustration purposes only.



Additional buttons included



Designed, Engineered & Certified to Australian Standards in Australia

S CLICK MECH TIMERS 2 WIRE

MINUTE MECH TIMER 2-WIRE 240V 1.7A

Unit: EA Qty: 1



Part No. **HNS410TM**

- 2-in-1 light switch that automatically turns off after a programmed time
- Time delay from 1-30 minutes, in minute increments -
- Setting retained even after loss of power
- Can be retrofitted to most installed lights



HOURLY MECH TIMER 2-WIRE 240V 1.7A.

Unit: EA Qty: 1



Part No. **HNS420TM**

- 2-in-1 light switch that automatically turns off after a programmed time
- Time delay from 1-24 hours, in hour increments -
- Setting retained even after loss of power
- Can be retrofitted to most installed lights



HOURLY TIMER S-PREMIUM 2-WIRE 240V 1.7A

Unit: EA Qty: 1



Part No. **HNS426TM**

- 2-in-1 light switch that automatically turns off after a programmed time
- Time delay from 1-24 hours, in hour increments -
- Settings retained even after loss of power
- Suits Clipsal Saturn and Saturn Zen style wall plates



MINUTE TIMER S-PREMIUM 2-WIRE 240V 1.7A

Unit: EA Qty: 1



Part No. **HNS416TM**

- 2-in-1 light switch that automatically turns off after a programmed time
- Time delay from 1-30 minutes, in minute increments -
- Setting retained even after loss of power
- Suits Clipsal Saturn and Saturn Zen style wall plates



S CLICK MECH TIMERS 3 WIRE

MINUTE MECH TIMER 3-WIRE 240V 5A

Unit: EA Qty: 1



Part No. **HNS440TM**

- 2-in-1 switch that automatically turns off after a programmed time
- Time delay from 1-30 minutes, in minute increments -
- Setting retained even after loss of power
- Can power fans, motors, pumps, contactors and inductive loads



LIGHTING AND ENERGY CONTROL

HOUR MECH TIMER 3-WIRE 240V 5A

Unit: EA Qty: 1



Part No. HNS450TM

- 2-in-1 power switch that automatically turns off after a programmable time
- Time delay from 1-24 hours, in hour increments
- Setting retained even after loss of power
- Can power fans, motors, pumps, contactors and inductive loads



MINUTE TIMER S-PREMIUM 3-WIRE 240V 5A

Unit: EA Qty: 1



Part No. HNS446TM

- 2-in-1 power switch that automatically turns off a programmed time
- Time delay from 1-30 minutes, in minute increments -
- Setting retained even after loss of power
- Can power fans, motors, pumps, contactors and inductive loads
- Suits Clipsal Saturn and Saturn Zen style wall plates



HOUR TIMER S-PREMIUM 3-WIRE 240V 5A

Unit: EA Qty: 1



Part No. HNS456TM

- 2-in-1 power switch that automatically turns off after a programmed time
- Time delay from 1-24 hours, in hour increments
- Setting retained even after loss of power
- Can power fans, motors, pumps, contactors and inductive load
- Suits Clipsal Saturn and Saturn Zen style wall plates



S CLICK MOTION DETECTORS

LIGHT SENSITIVE MOTION DETECTOR 230V

Unit: EA Qty: 1



Part No. HNS050MD

- MUST be used with S-Click 2-Wire and S-Click 3-Wire timer switches HNS410TM, HNS420TM, HNS440TM or HNS450TM
- Senses movement and light to trigger S-Click timer switches
- Fits in standard HPM and Clipsal face plates (lenses included)
- Designed, engineered and manufactured in Australia



CONTINUOUS MOTION DETECTOR 3 WIRE 230V

Unit: EA Qty: 1



Part No. HNS060MD

- MUST be used with S-Click 3-Wire timer switches HNS440TM or HNS450TM
- Senses movement to trigger S-Click timer switches
- Fits in standard HPM and Clipsal face plates (lenses included)
- Designed, engineered and manufactured in Australia



S CLICK BOOSTER RELAYS

MECH BOOSTER RELAY 3-WIRE 240V 10A

Unit: EA Qty: 1



Part No. **HNS010RL**

- Used in conjunction with HNS440TM, HNS450TM or HNS460SW
- Suitable for fans, motors and iron core ballasts
- Can be normally open or normally closed



HNS070UC USB Charger 3-Wire

FEATURES

- Suits Apple™, Samsung™ and all other smartphones, tablet brands or portable USB devices
- Fit up to six (6) USB Chargers in 1 wall plate
- Charge your tablet overnight
- High efficiency, only 50mW standby power
- Requires Neutral
- Compensates for cable losses
- Suits a wide range Australian wall plates including Clipsal 2000 Series™, C2000™, Saturn™ Data, Slimline® Clipsal Standard, HPM Excel and Excel Life bezels included

LOAD COMPATIBILITY

- Suitable for Apple™ iPhones®, iPads®, iPods®
- Suitable for Samsung™ Galaxy Phones and Tablets
- Other applications include:
 - Smartphones
 - Tablets
 - Action Cameras
 - eBook Readers
 - GPS Units
 - MP3/MP4 Players
 - Digital Cameras
 - Any portable USB chargeable devices

Part No. **HNS070UC**



NOTE: The HNS070UC is designed to charge portable devices with an internal battery. It should not be used as a continuous use power supply for devices without a battery.



USB CHARGERS

S CLICK USB CHARGERS

5W USB CHARGER 3WIRE 5.2V 1A

Unit: EA Qty: 1



Part No. **HNS070UC**

- The HNS070UC suits Apple, Samsung and all other smartphones, tablet brands or portable USB devices
- Fit up to 6x USB chargers in 1x wall plate
- High efficiency, only 50mW standby power
- Suits CABAC, Clipsal, HPM and Legrand style wall plates
- Bezels included



LIGHTING AND ENERGY CONTROL

WALL TIMERS

S CLICK WALL TIMERS

WALL TIMER SWITCH 230VAC 10A

Unit: EA Qty: 1



Part No. HNS210TD

- Designed for high power applications like motors, fans and pumps for pools and spas
- Two modes available - timer switch and restart timer switch
- High current 10A timer switch

ADVANCED WALL TIMER 230VAC 10A

Unit: EA Qty: 1



Part No. HNS220TD

- Designed for high power applications like motors, fans and pumps for pools and spas
- Two modes available - timer switch and restart timer switch
- Flexible, high current 10A, feature rich timer switch
- Can switch 8A of motor load

HSC110SS 16A Sunset Switch with Real Time mode!

The Sunset Switch is used to switch outdoors lights (or indoors light when applicable) off when they are not required in daylight.

In its most basic form, the unit senses outdoors light level and switches a relay on and off, thus turning the lights wired to it on or off. Traditionally the lights would turn on during sunset, therefore it is commonly known as a Sunset Switch.


FEATURES AND BENEFITS:

- 4 in 1 patented design
- Easy mode and timer programming using internal DIP switches
- Can be programmed to turn off at a fixed time every day - Real Time mode
- Industry compatible form factor suitable for retrofitting to HPM base
- IP66 rated product for worry free outdoor installations
- Heavy-duty brass terminals
- Max rated load 3840W (incandescent and PCB)
- 15 minute step timer range, up to 15.75 hours (or day break)
- All required parts are supplied including glands and DIP switch tool
- Quick installation with a short warm up time
- Higher power relay - fewer units are needed to control more lights
- Descriptive internal label for easy installation and set-up
- Turn ON/OFF delay stops inadvertent switches

4 MODES:

Mode 1 Standard	Mode 2 Timer
Mode 3 ECO	Mode 4 Real Time

Part No. HSC110SS

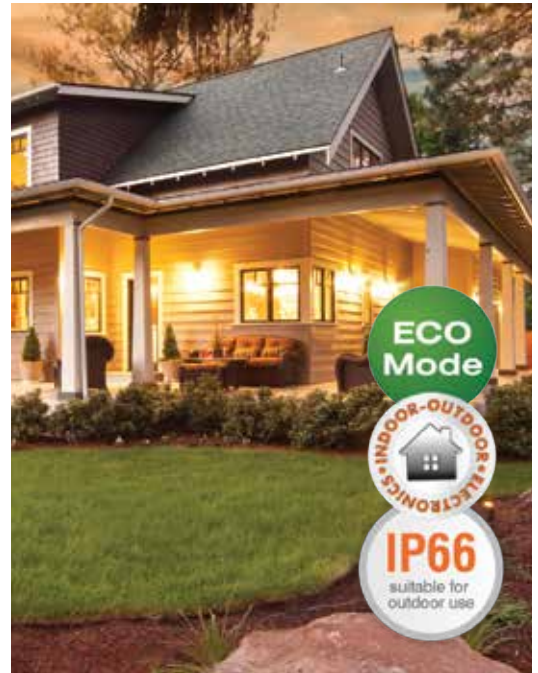

Designed, Engineered & Certified to Australian Standards in Australia



LIGHTING AND ENERGY CONTROL

OUTDOOR SWITCHES

CABAC SUNSET SWITCH

SWITCH SUNSET WEATHERPROOF 16A IP66

Unit: EA Qty: 1



Part No. HSC110SS

- Switches a 16A load on when the sun has set and off when sun rises with many user programmable features.
- 4 in 1 patented design: standard timer, energy saving, ECO, real time
- Pre configured at factory so you can install fastest.
- Heavy-duty brass terminals
- Suitable for retrofitting to HPM base



S-Click Routine Timer™ Towel Rail Kit (2-Wire)

Only the S-Click Routine Timer™ Towel Rail Kit delivers warm and dry towels at the time you need them.

FEATURES AND BENEFITS:

- Ideal for towel rails in your bathroom
- Adapts to your routine with a single sustained 2 second button press
- Automatically turns the power on every day at pre-determined times, then automatically turns off
- Duration times can be pre-set from 1 to 6 hours (factory default 1 hour)
- Holiday mode - suspends routine timer operation to save power, resume routine times with quick tap
- Can be manually operated with a quick tap for turning power on or off at any time
- Can have up to 8 pre-determined routine times per day
- Remembers routine times even after power failure
- Internal clock accurate to less than 5 seconds a month
- Internal battery retains routine times even after power loss - up to 24 hours
- Timer, wall plate and cable clamp included in kit
- Designed, Engineered and Manufactured in Australia

Part No. HNS710RT-KIT



Additional buttons included



For illustration purposes only. Towel rail and towels not included.



2 IN 1
Timer &
ON/OFF
Switch

S CLICK TOWEL RAIL TIMER KIT 2-WIRE



Designed, Engineered & Certified to Australian Standards in Australia

APPLICATION KITS

S CLICK APPLICATION KITS

FOLLOW ON FAN KIT

Unit: EA Qty: 1



Part No. HNS442FF

- Individual timer units to control all elements of a combination of lamp and fan - helps extract humid air and odours from bathroom and laundries
- Can reduce the growth of mould and mildew
- Helps improve air quality
- Eliminates accidentally leaving the power ON

3IN1 BATHROOM TIMER KIT

Unit: EA Qty: 1



Part No. HNS443BK

- Convenient timer kits designed for use with popular combination bathroom heater units which contain lights, fans and heaters
- Save energy and money
- No more leaving power on accidentally
- Switch on/off or time and programme individually
- Retains setting even after power loss

4IN1 BATHROOM TIMER KIT

Unit: EA Qty: 1



Part No. HNS444BK

- Convenient timer kits designed for use with popular combination bathroom heater units which contain lights, fans and heaters
- Save energy and money
- No more leaving power on accidentally
- Switch on/off or time and programme individually
- Retains setting even after power loss

TOWEL RAIL TIMER KIT 230V 350W 2-W

Unit: EA Qty: 1




Part No. HNS710RT-KIT

- Delivers warm and dry towels at the time you need them
- Adapts to your routine - single sustained 2 seconds button press
- Duration times can be pre-set from 1 to 6 hours
- Select up to 8 pre-determined routine times per day



2 Channel 20A Radio Switch

The S-Click™ HNS310RK is a Transmitter/ Receiver Kit containing a HNS312TR Transmitter and a HNS311RX Receiver. The 2 Channel battery powered Transmitter controls the 2 load outputs on the Receiver via RF (Radio Frequency) signals. The Transmitter inputs are connected to any type of on/off switches, typically a standard single gang or dual gang wall switch.

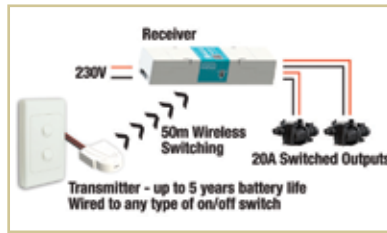

Applications for the S-Click™ 2 Channel 20A Radio Switch Transmitter/Receiver Kit could include sheds, garages, factories, farms, offices, warehouses, pools, heritage, industrial, brick and concrete tilt up buildings – in fact anywhere it's not possible to run wiring to the switch location!

FEATURES AND BENEFITS:

- Put switches anywhere with no wiring needed, saving time and money
- Compatible with all standard electrical switches with typical configurations - Single and Dual Gang Wall Switches
- Range up to 50m line of sight; 30m in standard domestic, commercial or industrial environments
- Heavy duty 20A outputs for loads of any type including inductive loads such as pumps, motors and fans
- Simple and ready to use - Units are paired straight out of the box
- Transmitter controlling up to 2 outputs of a Receiver
- Transmitter inputs connected to any type of on/off switch
- Battery Powered Transmitter (CR2032 Lithium Battery, supplied)
- User replaceable battery provides up to 5 years battery life
- Dual channel switching - Control two loads
- HNS312TR Transmitter designed to fit inside wall box or cavity
- HNS311RX Receiver designed to fit through a downlight hole

Part No. HNS310RK



UP TO 50m WIRELESS SWITCHING

Part No. HNS312TR

Part No. HNS311RX

S-CLICK 2 CHANNEL 20A Radio Switch

Designed, Engineered & Certified to Australian Standards in Australia

REMOTE SWITCHING

S CLICK RADIO SWITCHES

RADIO SWITCH KIT

Unit: EA Qty: 1



Part No. HNS310RK

- Put switches anywhere with no wiring needed, saving time and money
- Simple and ready to use - Units paired straight out of the box
- Transmitter controlling up to 2 outputs of a Receiver
- User replaceable battery provides up to 5 years battery life

RIPPLE FILTERS

S CLICK RIPPLE FILTERS

750HZ RIPPLE SIGNAL FILTER

Unit: EA Qty: 1



Part No. HNS030RF-750

- Simple and easy to install
- Guaranteed ripple signal flicker free with S-Click Dimmers
- Works with LED, Halogen, CFL and Incandescent lamps
- External switch to select frequency
- Designed to fit through downlight hole

1050HZ RIPPLE SIGNAL FILTER

Unit: EA Qty: 1



Part No. HNS030RF-1050

- Simple and easy to install
- Guaranteed ripple signal flicker free with S-Click Dimmers
- Works with LED, Halogen, CFL and Incandescent lamps
- External switch to select frequency
- Designed to fit through downlight hole

ACCESSORIES

S CLICK BUTTONS

REMOTE BUTTON FOR DIMMERS & 3WIRE TIMERS

Unit: EA Qty: 1



Part No. HNS020RB

- Suits the S-Click HNS610DT 2-wire dimmer only
- Suits S-Click HNS440TM, HNS450TM and HNS460SW 3-Wire Timers only
- Push Buttons included - suits Clipsal and HPM Style wall plates
- LED Indicator Colour: White



REMOTE BTN FOR PREM DIMMERS & 3W TIMERS

Unit: EA Qty: 1



Part No. HNS026RB

- Suits the S-Click S-Premium HNS616DT Digital Dimmer only
- Suits S-Click S-Premium HNS446TM and HNS456TM 3-Wire Timers only
- Suits Clipsal Saturn and Saturn Zen wall plates
- LED Indicator Colour: Blue



- Buttons to compliment the S-Click range of Switches and Dimmers
- Pack Qty: 10
- Knobs and bezels are also available



Part No.	Description	Unit	Qty
HNSBTNCPBLK	BUTTON SUIT CLIPSAL BLACK	PAK	10
HNSBTNHMBLK	BUTTON SUIT HPM EXCEL BLACK	PAK	10
HNSBTNHMWHT	BUTTON SUIT HPM EXCEL ELECTRIC WHITE	PAK	10

LIGHTING AND ENERGY CONTROL

S CLICK BEZELS



- Buttons to compliment the S-Click range of Switches and Dimmers
- Pack Qty: 10
- Knobs and buttons are also available

Part No.	Description	Unit	Qty
HNSBZLCPWHT	BEZEL SUIT CLIPSAL ELECTRIC WHITE	PAK	10
HNSBZLCPBLK	BEZEL SUIT CLIPSAL BLACK	PAK	10
HNSBZLHMWHT	BEZEL SUIT HPM ELECTRIC WHITE	PAK	10
HNSBZLHMBLK	BEZEL SUIT HPM EXCEL BLACK	PAK	10
HNSBZLLFWHT	BEZEL SUIT HPM EXCEL LIFE ELECTRIC WHITE	PAK	10
HNSBZLCPBRL	BEZEL SUIT CLIPSAL BRILLIANT WHITE	PAK	10
HNSBZLLFBLK	BEZEL SUIT HPM EXCEL LIFE BLACK	PAK	10

S CLICK KNOBS



- Knobs to compliment the S-Click range of Dimmers
- Pack Qty: 10
- Bezels and buttons are also available

Part No.	Description	Unit	Qty
HNSKNBCPWHT	KNOB SUIT CLIPSAL ELECTRIC WHITE	PAK	10
HNSKNBCPBLK	KNOB SUIT CLISPAL BLACK	PAK	10
HNSKNBPDWHT	KNOB SUIT PDL WHITE	PAK	10
HNSKNBCBWHT	KNOB SUIT CABAC ELECTRIC WHITE	PAK	10
HNSKNBCBBLK	KNOB SUIT CABAC BLACK	PAK	10
HNSKNBSNSVR	KNOB SUIT SATURN INCLUDING RING	PAK	10
HNSKNBZNWHT	KNOB SUIT SATURN ZEN ELECTRIC WHITE	PAK	10
HNSKNBHMWHT	KNOB SUIT HPM EXCEL ELECTRIC WHITE	PAK	10
HNSKNBHMBLK	KNOB SUIT HPM BLACK	PAK	10

OTHER

NOISE SUPPRESSION CAPACITOR

Unit: EA Qty: 1



Part No. HNSSUPCAP

- Use for fans that can crash dimmers
- Stops night light effects and light flash when the dimmer is off

BLEED RESISTOR

Unit: EA Qty: 1



Part No. HNSBLDRES

- Some Capacitive Lamps store too much charge - the resistor bleeds this out

R/C NETWORK

Unit: EA Qty: 1



Part No. HNSRCNETW
• Make 3-Wire Timer Power up OFF



S-Click™ SMART LIVING Range

The modular S-Click™ Smart Living range is Australia's largest; with a choice for almost any application. The entire S-Click™ range is simple to install, easy to use and creates a new, modern look for your home.

The range includes solutions for bedrooms, kitchens, hallways, dining rooms, outdoor living rooms, bathrooms, heat lamps, fans, exhaust fans, spa air pumps, towel rails, laundries, meeting rooms, workspaces, robes, pantries, cellars, garages, garden lighting, water features, security lighting, and charging for smart phones, tablets and portable USB devices. Smart Living - Every home deserves the best.

DIGITAL DIMMER™ RANGE

Model	Description	Indicator Colour	Use with Dimmable LED	Integrated ON/OFF Switch	Transformers or Ballasts		Multitway Dimming	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
					Electronic	Wire Wound/Iron Core								
D₂ HNS610DDT	Push Button Digital Dimmer™	White	✓	✓	✓	✓ ¹	Yes with HNS202ORB	✗	ON/OFF Switch	350W	1.5	10	2kV	Dimmable LED & CFL Lighting & Multitway Dimming
D₂ HNS620DDT	Rotary Digital Dimmer™ Switch	White	✓	✓	✓	✓ ¹	Yes with HNS202ORB	✗	ON/OFF Switch	350W	1.5	10	2kV	Dimmable LED & CFL Lighting & Multitway Dimming
D₂ HNS630DDT	Rotary Digital Dimmer™	White	✓	✗	✓	✓ ¹	✗	✗	Simple	350W	1.5	10	2kV	Dimmable LED & CFL Lighting Dual Switch Compatible
RE HNS020RB	Remote Button	White												Use with Dimmer and 3-Wire Timers and Switches Only

FANS, MOTORS, COMMERCIAL LIGHTS, TIMERS, SWITCHES, RELAYS & SENSORS

Model	Description	Max Time Out	Indicator Colour	Multi Switch Compatible	Transformers or Ballasts		Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
					Electronic	Wire Wound/Iron Core								
M₃ HNS440TM	Minute Timer 3-Wire	30 Mins	Blue	Yes with HNS020RB	✓	✓	✓	✓	Indefinitely On	1200W 500VA	5	0	2kV	Heat Lamps, Fans, Exhaust Fans, Spa Air Pump
H₃ HNS450TM	Hour Timer 3-Wire	24 Hours	Amber	Yes with HNS020RB	✓	✓	✓	✓	Boost Mode	1200W 500VA	5	0	2kV	Small Pool Pumps, Water Features, Garden & Decorative Lighting
E₃ HNS460SW	Electronic Switch 3-Wire	Never	Blue	Yes with HNS020RB	✓	✓	✓	✓	Simple	1200W 500VA	5	0	2kV	Exhaust Fans, Garden & Decorative Lighting
B₃ HNS010RL	Booster Relay 3-Wire	Timer Dependent	N/A	N/A	✓	✓	✓	✓	Slave	2400W 1200VA 6AX	10	0	4kV	Large Pool Pumps, Electrical Motors & Timed Power Points
M₃ HNS050MD	Light Sensitive Motion Detector 3-Wire	Timer Dependent	Red		Depends On Timer				Light Sensitive	Timer Dependent	5	0	2kV	Meeting Rooms, Workspaces
M₃ HNS060MD	Continuous Motion Detector 3-Wire	Timer Dependent	Red		Depends On Timer				Continuously Restarts Timer	Timer Dependent	5	0	2kV	Bathrooms, Office Bathrooms & Laundries
HNS210TD	Heavy-Duty Timer Switch 3-Wire	4 Hours	Blue	Yes with HNS020RB	✓	✓	✓	✓	Adjustable Timeout Range	2400W 2400VA 10AX	10	0	4kV	Suitable for majority of applications especially suited for fan motors
HNS220TD	Advanced Heavy-Duty Timer Switch 3-Wire	15 Hours	Blue	Yes with HNS020RB	✓	✓	✓	✓	Configurable LED Indicator and Switch Mode	2400W 2400VA 10AX	10	0	2kV	Improved compatible replacement for Clipsal 2031VETR3 and 32VETR3

Installation: The modular S-Click™ range are to be installed as part of a fixed wire electrical installation.

By law such installations must be made by a licensed electrical contractor or similarly qualified person. † Atco & Clipsal Brand.

S-Click™ has a policy of continuous product improvement and reserves the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where available, technical and MSDS data sheets are available on the S-Click™ website. All S-Click™ products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to S-Click™ website for terms and conditions on warranty.

Part No. SCLICKCOMPCHART

SCLICK.COM.AU



Designed, Engineered & Certified to Australian Standards in Australia



S-Click™ SMART LIVING Range

MULTIWAY DIMMING		Description	Kit Includes	Suggested Use
HNS610DSDK	Dual Switching Dimmer Kit	1x HNS610DT - Push Button Digital Dimmer™ 1x HNS292RB - Remote Button	Multway dimming	

DOMESTIC TIMERS & SWITCHES														
	Description	Max Time Out	Indicator Colour	Multway Switch Compatible	Transformers or Ballasts Electronic	Wire Wound/Iron Core	Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (mA)	Surge Rating	Suggested Use
M ₂	HNS410TM Minute Timer 2-Wire	30 Mins	Blue	Yes with Momentary Mains Switch	✓	✗	✗	✗	Indefinitely On	400W 400VA	1.7	10	4kV	Lights - Hallway, Garages, Laundries, Wardrobes
H ₁	HNS420TM Hour Timer 2-Wire	24 Hours	Amber	Yes with Momentary Mains Switch	✓	✗	✗	✗	Boost Mode	400W 400VA	1.7	10	4kV	Heated Towel Rail (<400W), Heated Mirrors, Security Lighting, Garden & Decorative Lighting
E ₂	HNS430SW Electronic Switch 2-Wire	Never	Blue	Yes with Momentary Mains Switch	✓	✗	✗	✗	Simple	400W 400VA	1.7	10	4kV	Lights, Heaters, Garden Lighting

ROUTINE TIMERS														
	Description	Max Time Out	Indicator Colour	Multway Switch Compatible	Transformers or Ballasts Electronic	Wire Wound/Iron Core	Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (mA)	Surge Rating	Suggested Use
R ₁	HNS710RT Routine Timer	12 Hours	Red	Yes with Momentary Mains Switch	✓	✗	✗	✗	Timer Switch	300W 300VA	1.3	10	2kV	Towel Rails, Security Lighting, Heated Mirrors

CHARGERS										
	Description	Charge Power	Charge Current	Charge Voltage	Surge Rating	Additional Features	Australian Standards Certified	Suggested Use		
E ₂	HNS070UC 5W USB Charger 3-Wire	5W	1A	5V	2kV	Suits most Australian wall plates, fits up to 6 USB Charges on one wall plate	Certified to AS/NZS 60950-1, CISPR22 and AS/NZS 4665 Standards	Use for charging Apple™, Samsung™ and all other phone and tablet brands. Charge other USB devices.		

KITS										
	Description	Timers Included	Indicator Colour	Kit Includes	Suggested Use					
HNS710RT-KIT	Towel Rail Timer Kit 2-Wire	1x HNS710RT	Red	1x HNS710RT Routine Timer Switch - adapts to your routine, Wall Plate, Buttons, Cable Clamp, Wiring Instructions	350W Max Load: Heated Towel Rail, Heated Mirrors, Outdoor Lights					
HNS442FF	Follow-On Fan Kit	1x HNS410TM 1x HNS440TM	Blue	1x HNS410TM and 1x HNS440TM Timer Switches, Buttons, Wiring Instructions	Bathrooms, Office Bathrooms, Laundries, Change Rooms					
HNS443BK	3 in 1 Bathroom Timer Kit 3-Wire	3x HNS440TM	Blue	3x HNS440TM Timer Switches, 3 gang Labelled Wall Plate, Buttons, Wiring Instructions	1200W for Bathroom Heat/Light/Fan Units					
HNS444BK	4 in 1 Bathroom Timer Kit 3-Wire	4x HNS440TM	Blue	4x HNS440TM Timer Switches, 4 gang Labelled Wall Plate, Buttons, Wiring Instructions	2400W for Bathroom Heat/Light/Fan Units					



Designed, Engineered & Certified to Australian Standards in Australia

Installation: The modular S-Click™ range are to be installed as part of a fixed wire electrical installation.

By law such installations must be made by a licensed electrical contractor or similarly qualified person. Atco & Clipsal Brand.

S-Click™ has a policy of continuous product improvement and reserves the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where available, technical and MSDS data sheets are available on the S-Click™ website. All S-Click™ products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to S-Click™ website for terms and conditions on warranty.

Part No. SCLCKCOMPHART

SCLICK.COM.AU



S-Premium™ is a range extension of the successful S-Click™ Smart Living range and are specifically designed to be compatible with Clipsal Saturn™ and Saturn Zen™ wall plates. The push button dimmers and timers make use of the button already installed in the wall plate, while the rotary dimmers come with knobs and chrome ring designed to match the Saturn™ and SaturnZen™ look. With this range you now have the ability to time 2-Wire and 3-Wire circuits, a feature not currently available.

The S-Premium™ range includes 2 rotary versions of Digital Dimmer™, one with integrated ON/OFF push switch, that feature a blue indicator LED that beautifully matches existing installed switches.

COMPATIBLE WITH CLIPSAL SATURN™ AND SATURN ZEN™ WALL PLATES ONLY.

DIGITAL DIMMER™ RANGE

Part No.	Description	Indicator Colour	Use with Dimmable LED	Integrated ON/OFF Switch	Transformers or Ballasts Electronic	Wire Wound/ Iron Core	Multway Dimming Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
D₂ HNS616BDT	Push Button Digital Dimmer™	Blue	✓	✓	✓	✓	Yes with HNS026RB	✗	ON/OFF Switch	350W	1.5	10	2kV	Perfect for Dimmable LED lights Multway Dimming using HNS026RB
D₂ HNS626DT	Rotary Digital Dimmer™ Switch	Blue	✓	✓	✓	✓	Yes with HNS026RB	✗	ON/OFF Switch	350W	1.5	10	2kV	Perfect for Dimmable LED lights Multway Dimming using HNS026RB
D₂ HNS636DT	Rotary Digital Dimmer™	Blue	✓	✗	✓	✓	✗	✗	Simple	350W	1.5	10	2kV	Perfect for Dimmable LED lights

FANS, MOTORS, COMMERCIAL LIGHTS

Part No.	Description	Max Time Out	Indicator Colour	Multway Switch Compatible	Transformers or Ballasts Electronic	Wire Wound/ Iron Core	Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
M₃ HNS446TM	Minute Timer 3-Wire	30 Mins	Blue	Yes with HNS026RB	✓	✓	✓	✓	Indefinitely On	1200W 500VA	5	0	2kV	Heat Lamps, Fans, Exhaust Fans, Spa Air Pump
H₃ HNS456TM	Hour Timer 3-Wire	24 Hours	Amber	Yes with HNS026RB	✓	✓	✓	✓	Boost Mode	1200W 500VA	5	0	2kV	Small Pool Pumps, Water Features, Garden & Decorative Lighting

S-PREMIUM MULT-WAY DIMMING, 3-WIRE TIMERS AND SWITCHING

Part No.	Description	Indicator Colour	Indicator Operation	Additional Feature	Suggested Use
F₂ HNS026RB	Remote Button	Blue	Configurable - Always ON, Always OFF or ON when pressed	LED Indicator Requires Neutral - Button operates without neutral	Use with Dimmer and 3-Wire Timers and Switches Only

DOMESTIC LIGHTING

Part No.	Description	Max Time Out	Indicator Colour	Multway Switch Compatible	Transformers or Ballasts		Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
					Electronic	Wire Wound/ Iron Core								
M₂ HNS416TM	Minute Timer 2-Wire	30 Mins	Blue	Yes with Momentary Mains Switch	✓	✗	✗	✗	Indefinitely On	400W 400VA	1.7	10	4kV	Lights - Hallway, Garages, Laundries, Wardrobes
H₂ HNS426TM	Hour Timer 2-Wire	24 Hours	Amber	Yes with Momentary Mains Switch	✓	✗	✗	✗	Boost Mode	400W 400VA	1.7	10	4kV	Heated Towel Rail (<400W), Heated Mirrors, Security Lighting, Garden & Decorative Lighting

ROUTINE TIMERS

Part No.	Description	Max Time Out	Indicator Colour	Multway Switch Compatible	Transformers or Ballasts		Dimmer Compatible	Fans Compatible	Additional Feature	Max Load	Max Current (A)	Min Current (VA)	Surge Rating	Suggested Use
					Electronic	Wire Wound/ Iron Core								
F₁ HNS716RT	Routine Timer	12 Hours	Red	Yes with Momentary Mains Switch	✓	✗	✗	✗	Timer Switch	300W 300VA	1.3	10	2kV	Towel Rails, Security Lighting, Heated Mirrors

Installation: The modular S-Click™ range are to be installed as part of a fixed wire electrical installation. By law such installations must be made by a licensed electrical contractor or similarly qualified person.

Atco & Clipsal Brand, Saturn™ is a registered Trademark of Schneider Electric Pty. Ltd.



LIGHTING AND ENERGY CONTROL

HNS620DT	84
HNS630DT	84
HNS626DT	84
HNS636DT	84
HNS610DT	84
HNS616DT	85
HNS430SW	85
HNS460SW	85
HNS410TM	87
HNS420TM	87
HNS426TM	87
HNS416TM	87
HNS440TM	87
HNS450TM	88
HNS446TM	88
HNS456TM	88
HNS050MD	88
HNS060MD	88
HNS010RL	89
HNS070UC	89
HNS210TD	90
HNS220TD	90
HSC110SS	92
HNS442FF	92
HNS443BK	93
HNS444BK	93
HNS710RT-KIT	93
HNS310RK	94
HNS030RF-750	94
HNSBTNCPBLK	95
HNSBTNHMBLK	95
HNSBTNHMWHT	95
HNS030RF-1050	95
HNS020RB	95
HNS026RB	95
HNSBZLCPWHT	96
HNSBZLCPBLK	96
HNSBZLHMWHT	96
HNSBZLHMBLK	96
HNSBZLLFWHT	96
HNSBZLCPBRL	96
HNSBZLLFBLK	96
HNSKNBCPWHT	96
HNSKNBCPBLK	96
HNSKNBPDWHT	96
HNSKNBCBWHT	96
HNSKNBCBBLK	96
HNSKNBSNSVR	96
HNSKNBZNWHT	96
HNSKNBHMWHT	96
HNSKNBHMBLK	96
HNSSUPCAP	96
HNSBLDRES	96
HNSRCNETW	97

In support of our policy of continuous product improvement we reserve the right to change materials and specifications without notice. Drawings, where used, are not to scale. All dimensions are in millimetres and sizes given are approximate. Where possible, technical MSDS data sheets are made available on the website. All products should be installed and used in accordance with manufacturer's instructions provided. Warning: products may be the subject of registered designs and patents. Refer to website for terms and conditions on warranty.

Every effort has been made to ensure accuracy of content. However no liability will be met by System Control Engineering or its suppliers for any errors or omissions.
Product data and information is not binding.

All brands and logos are registered trademarks and are subject to copyright laws.

No part of this catalogue can be reproduced without consent of System Control Engineering.